



3D Surface Scanner Using Structured Light & Industrial Robot

Stets, Jonathan Dyssel; Dahl, Anders Lindbjerg; Aanæs, Henrik

Publication date:
2011

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Stets, J. D., Dahl, A. L., & Aanæs, H. (2011). *3D Surface Scanner Using Structured Light & Industrial Robot*. Poster session presented at Visionday 2011, Kgs. Lyngby, Denmark. <http://www.visiondays.dk/>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

3D SURFACE SCANNER

USING STRUCTURED LIGHT & INDUSTRIAL ROBOT

Jonathan Dyssel Stets, Anders Lindbjerg Dahl and Henrik Aanæs
Technical University of Denmark



Introduction


Having a detailed surface reconstruction of an object is very valuable in for example geometric modeling, to store an art piece for the future or to scan real objects to use in computer graphics such as 3D drawings, computer games etc..

Imaging Robot

The imaging robot is an industrial robot from ABB Robotics with an interface designed for performing imaging tasks. A camera, laser or STL scanner can be mounted on the robot. →





← The interface to calculate the robots motions is programmed in Matlab, and can also predict collisions with the surroundings and specified objects.


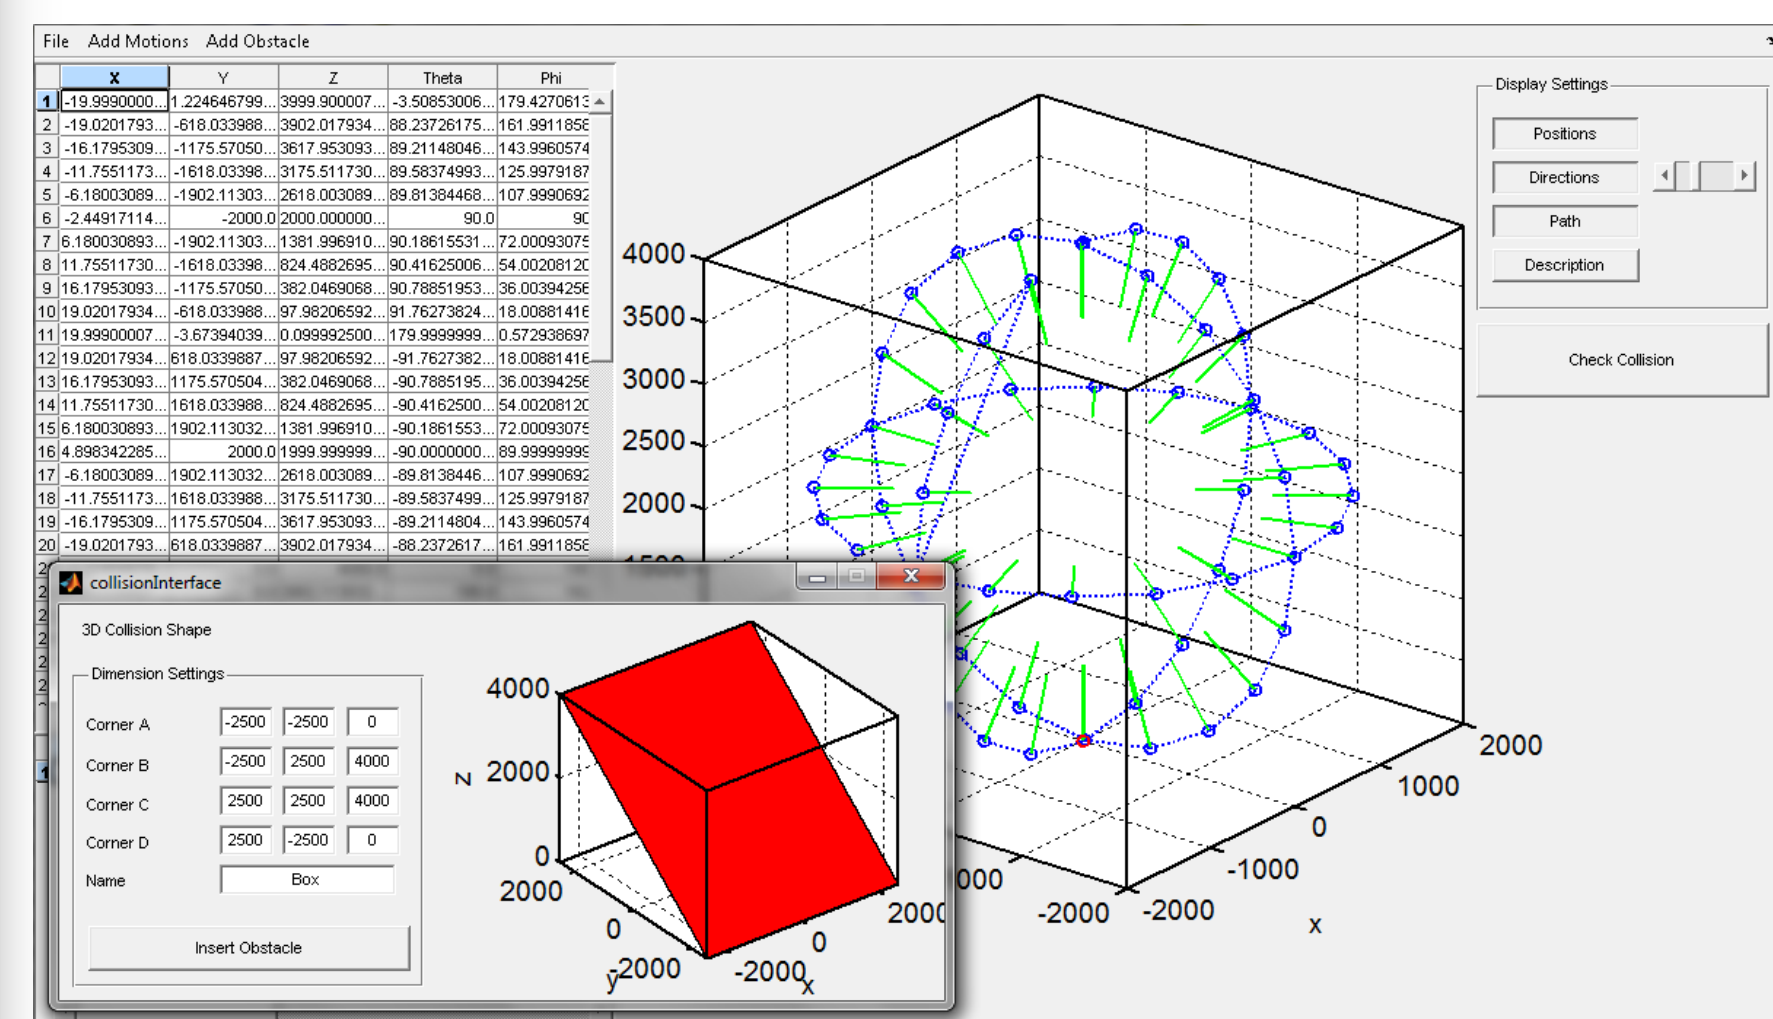


SPECIFICATION & FEATURES


← **Cartesian coordinates & Euler Angles.** → Calculate motion path for the robot arm, and directions for the mounted tool (camera/STL).

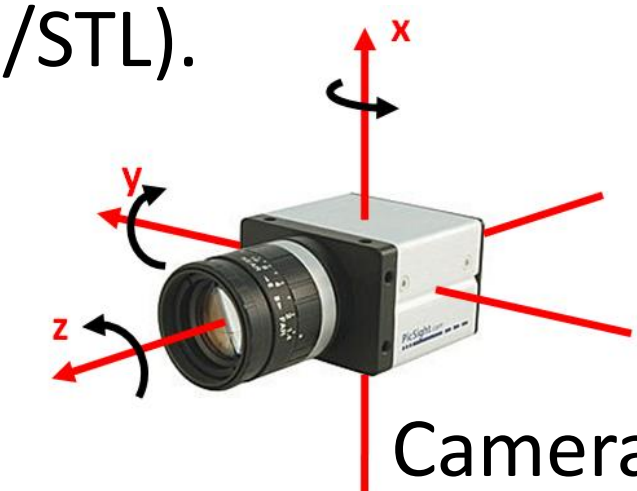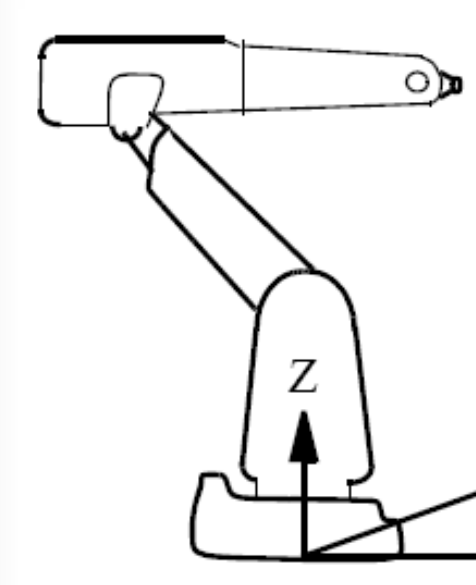

Camera rotation

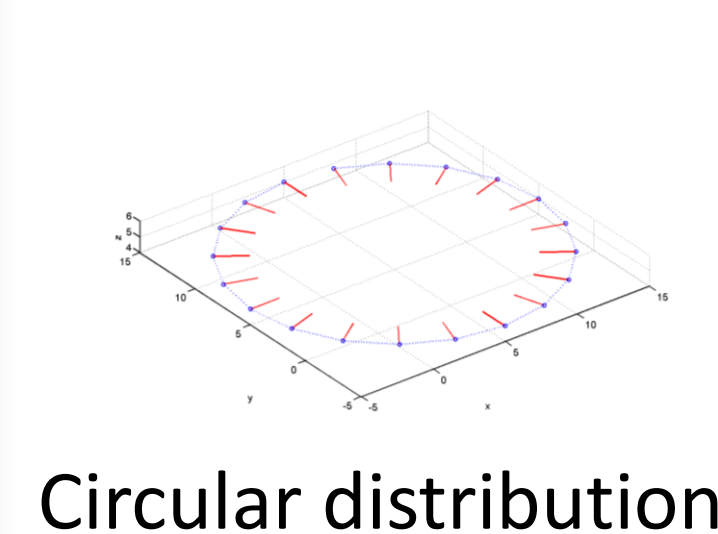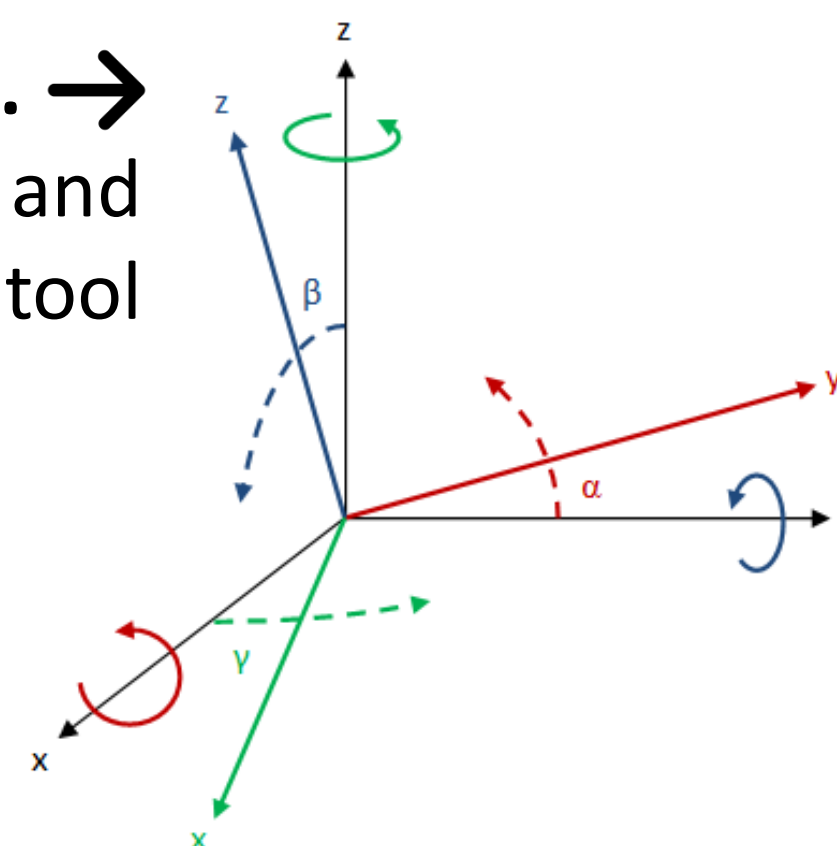


Circular distribution

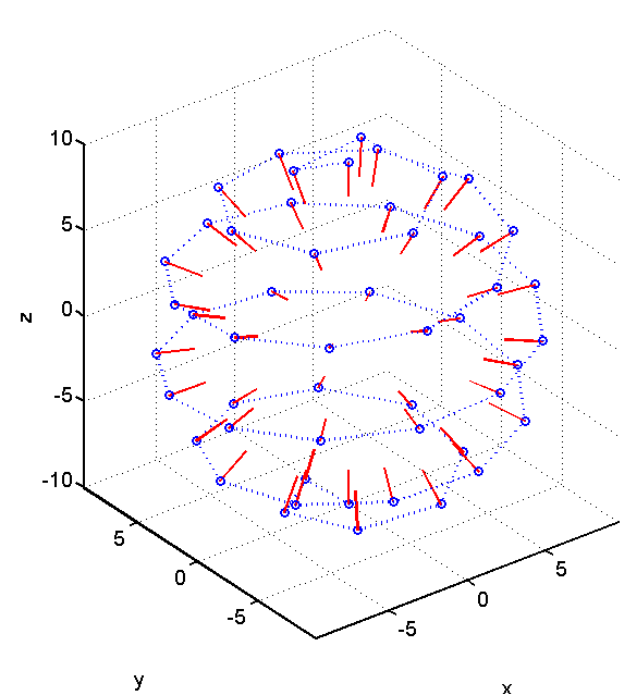

Plain distribution

← **Points on a sphere.** Distribute motion points evenly on the surface of a sphere or other geometric shapes.


1

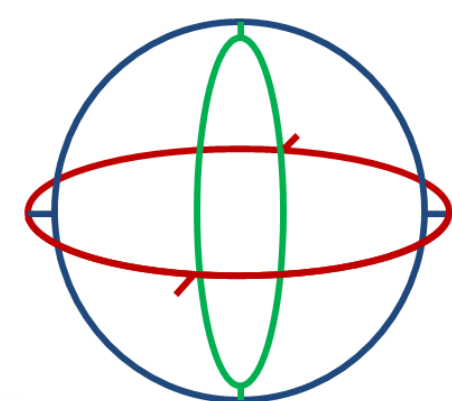

Gimbal Lock. Gimbal lock occurs when two or more gimbals are aligned. This can have fatal consequences.


← Normal State

Gimbal lock →

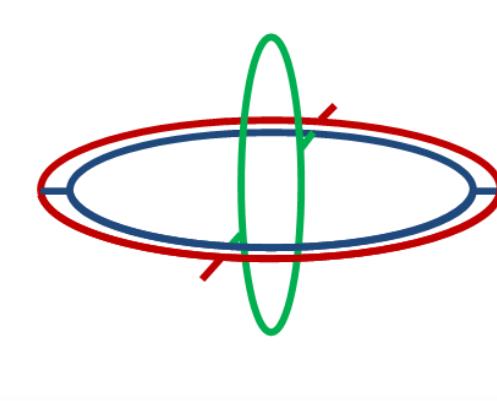


Structured Light Scanner


The Structured Light Scanner consists of two cameras and a projector. The setup uses two Point Grey cameras, and a pico projector which makes is so small that its mountable on the Imaging Robot arm. →

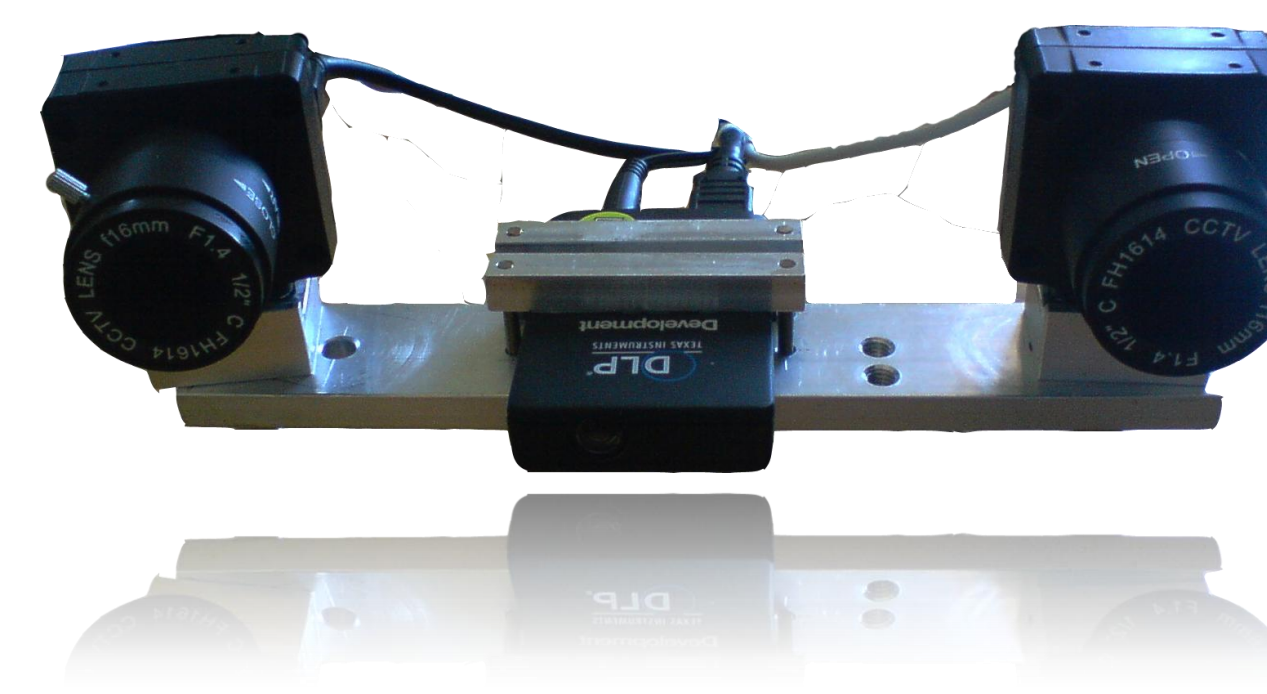


HOW IT WORKS

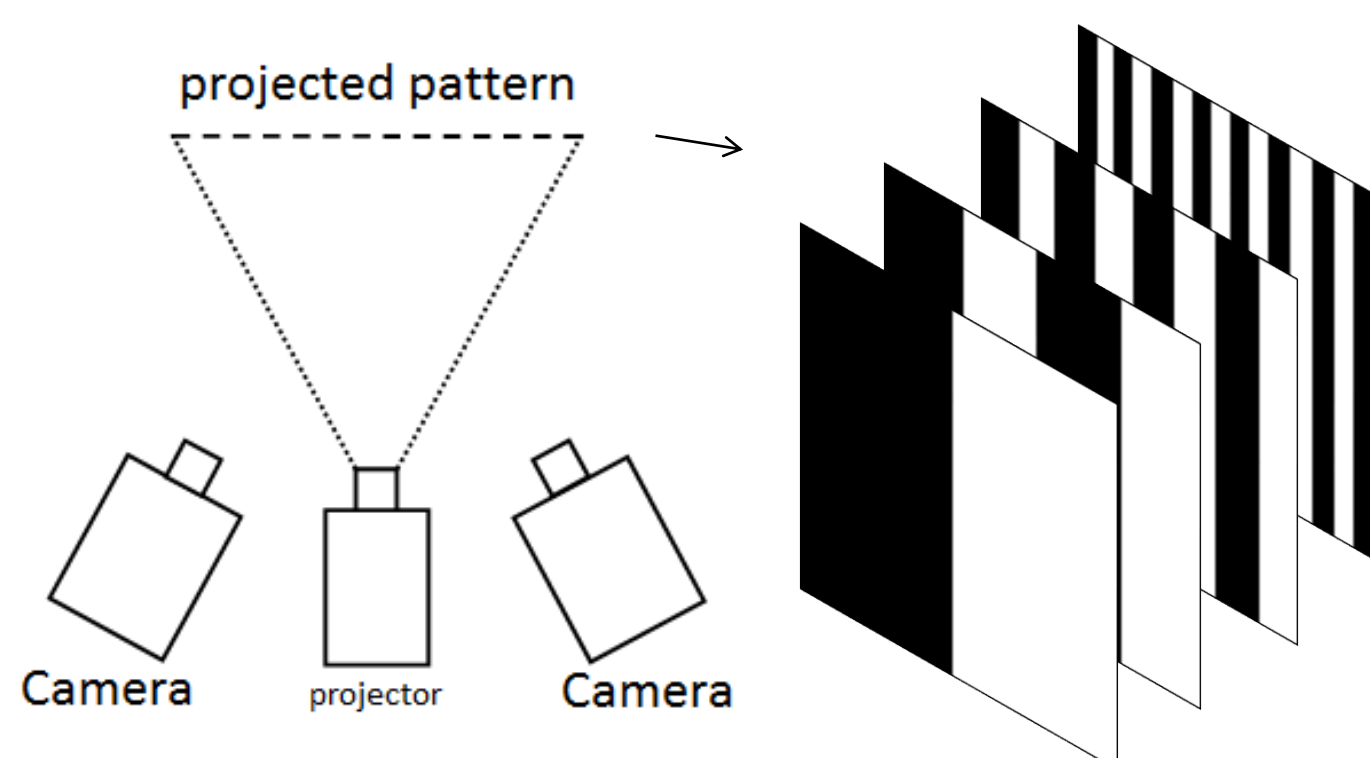

← The projector projects a binary coded pattern on to the object. The cameras captures the result for every projected pattern, and by using triangulation, its possible to construct a point cloud representing the scanned object.

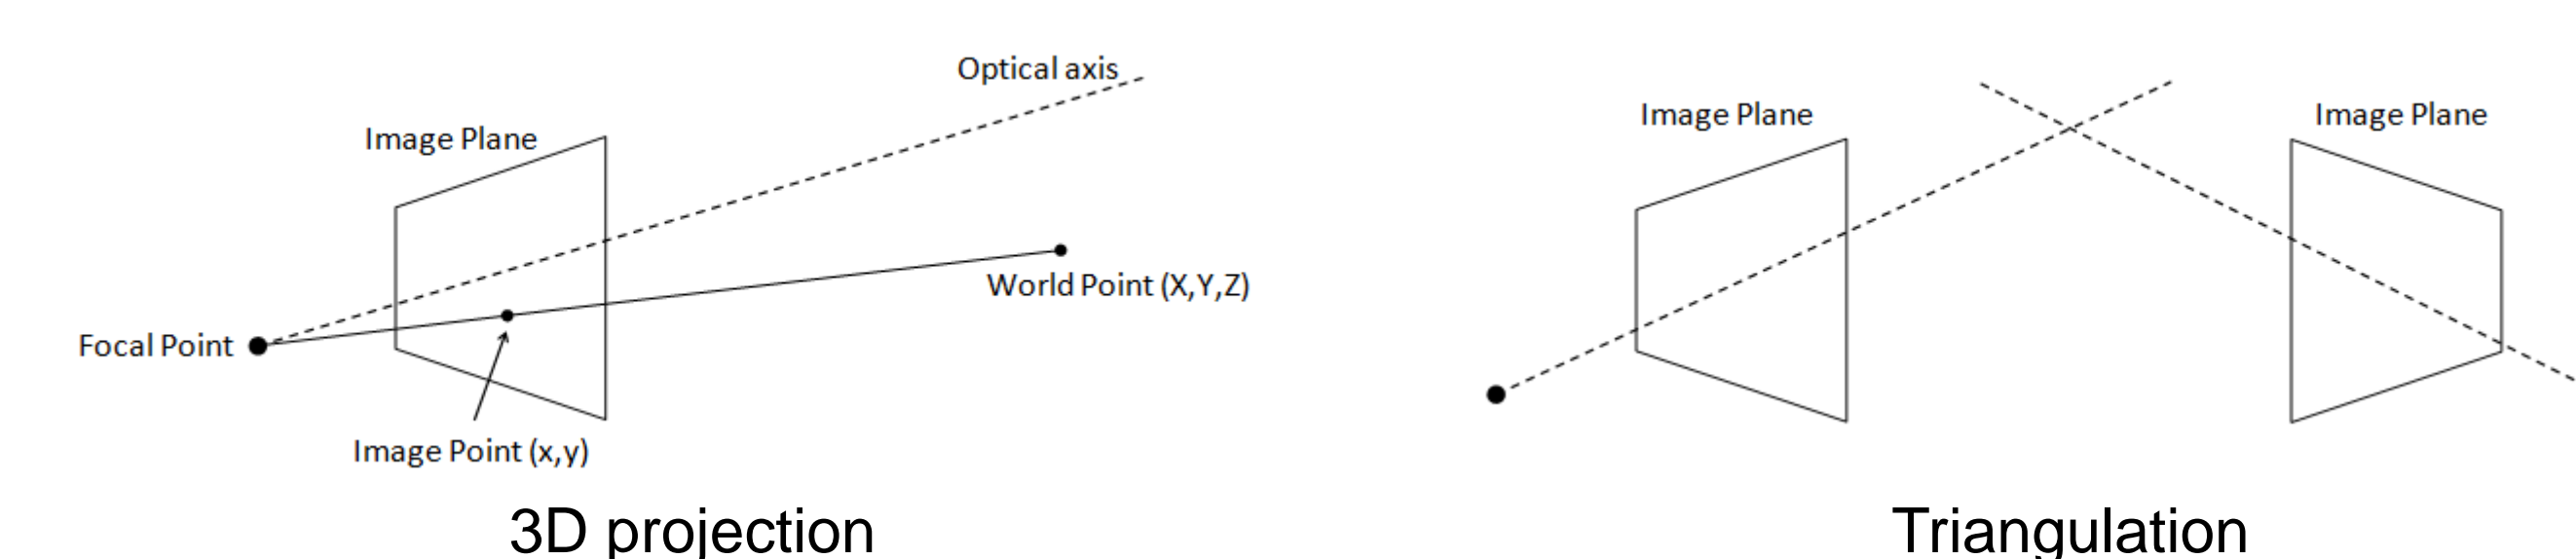

EXAMPLE

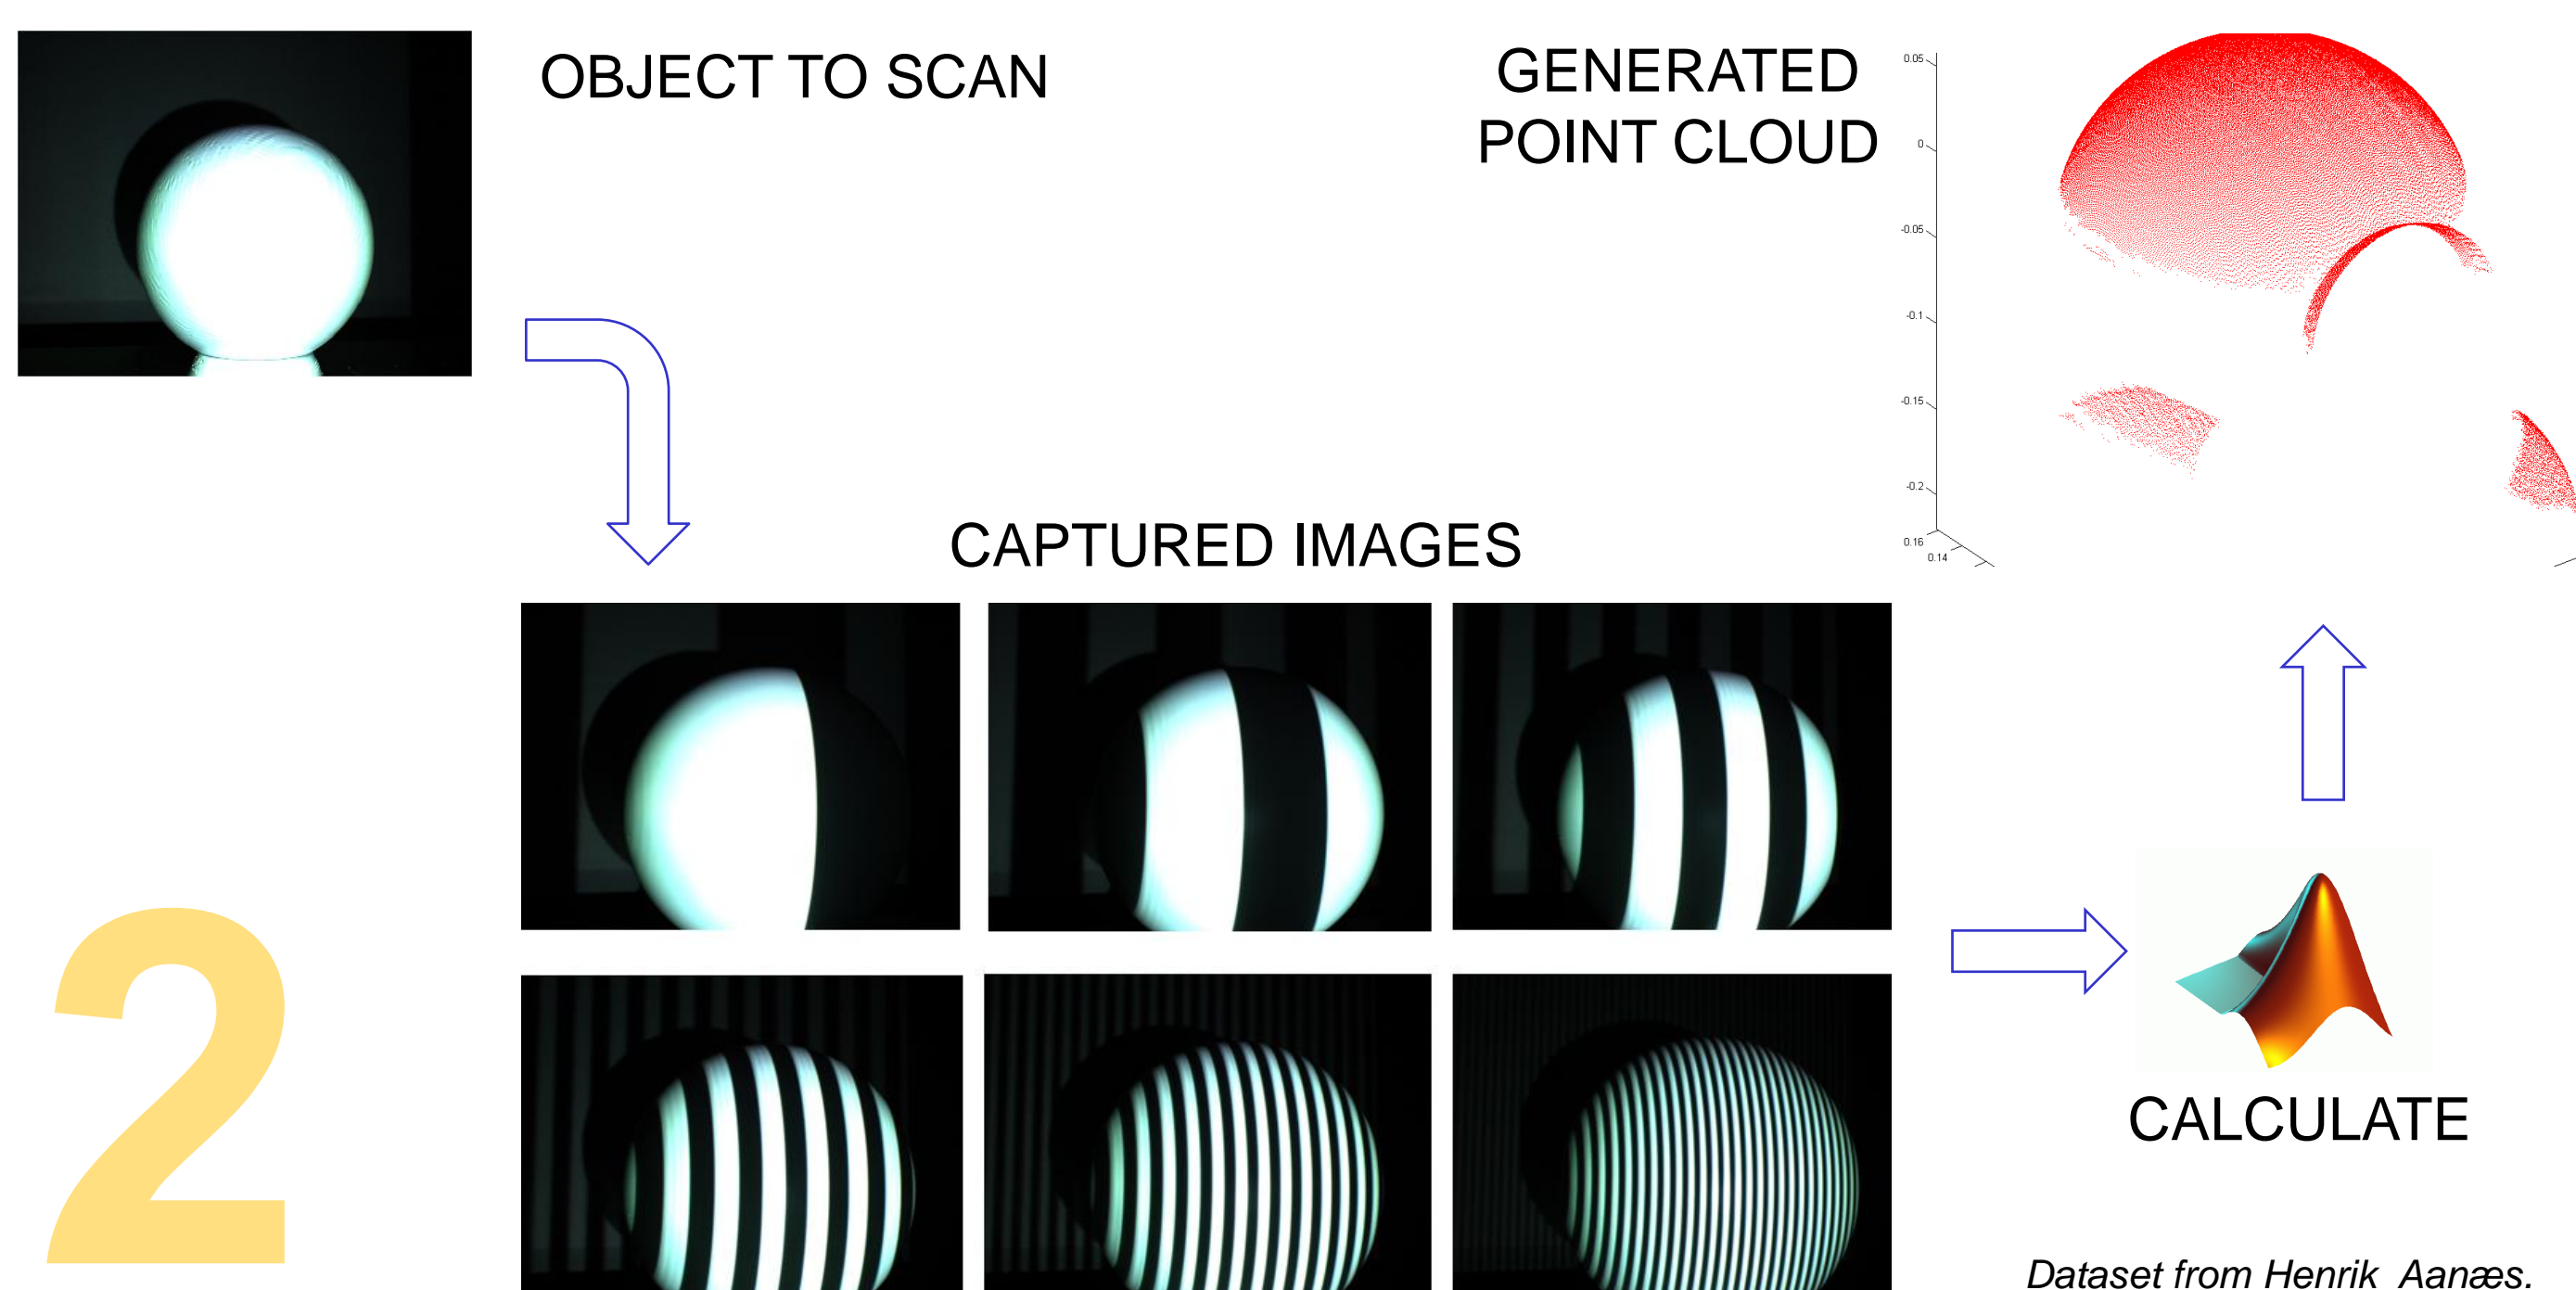


3D Surface Scanner

Mounting the STL scanner on the robot gives the potential for approximately full surface scan of complex objects.

HOW IT WORKS


Moving the STL scanner around the object and recording the exact positions and directions of the scanner and the generated point clouds. Then it is possible to combine all the point clouds to one full surface point cloud.

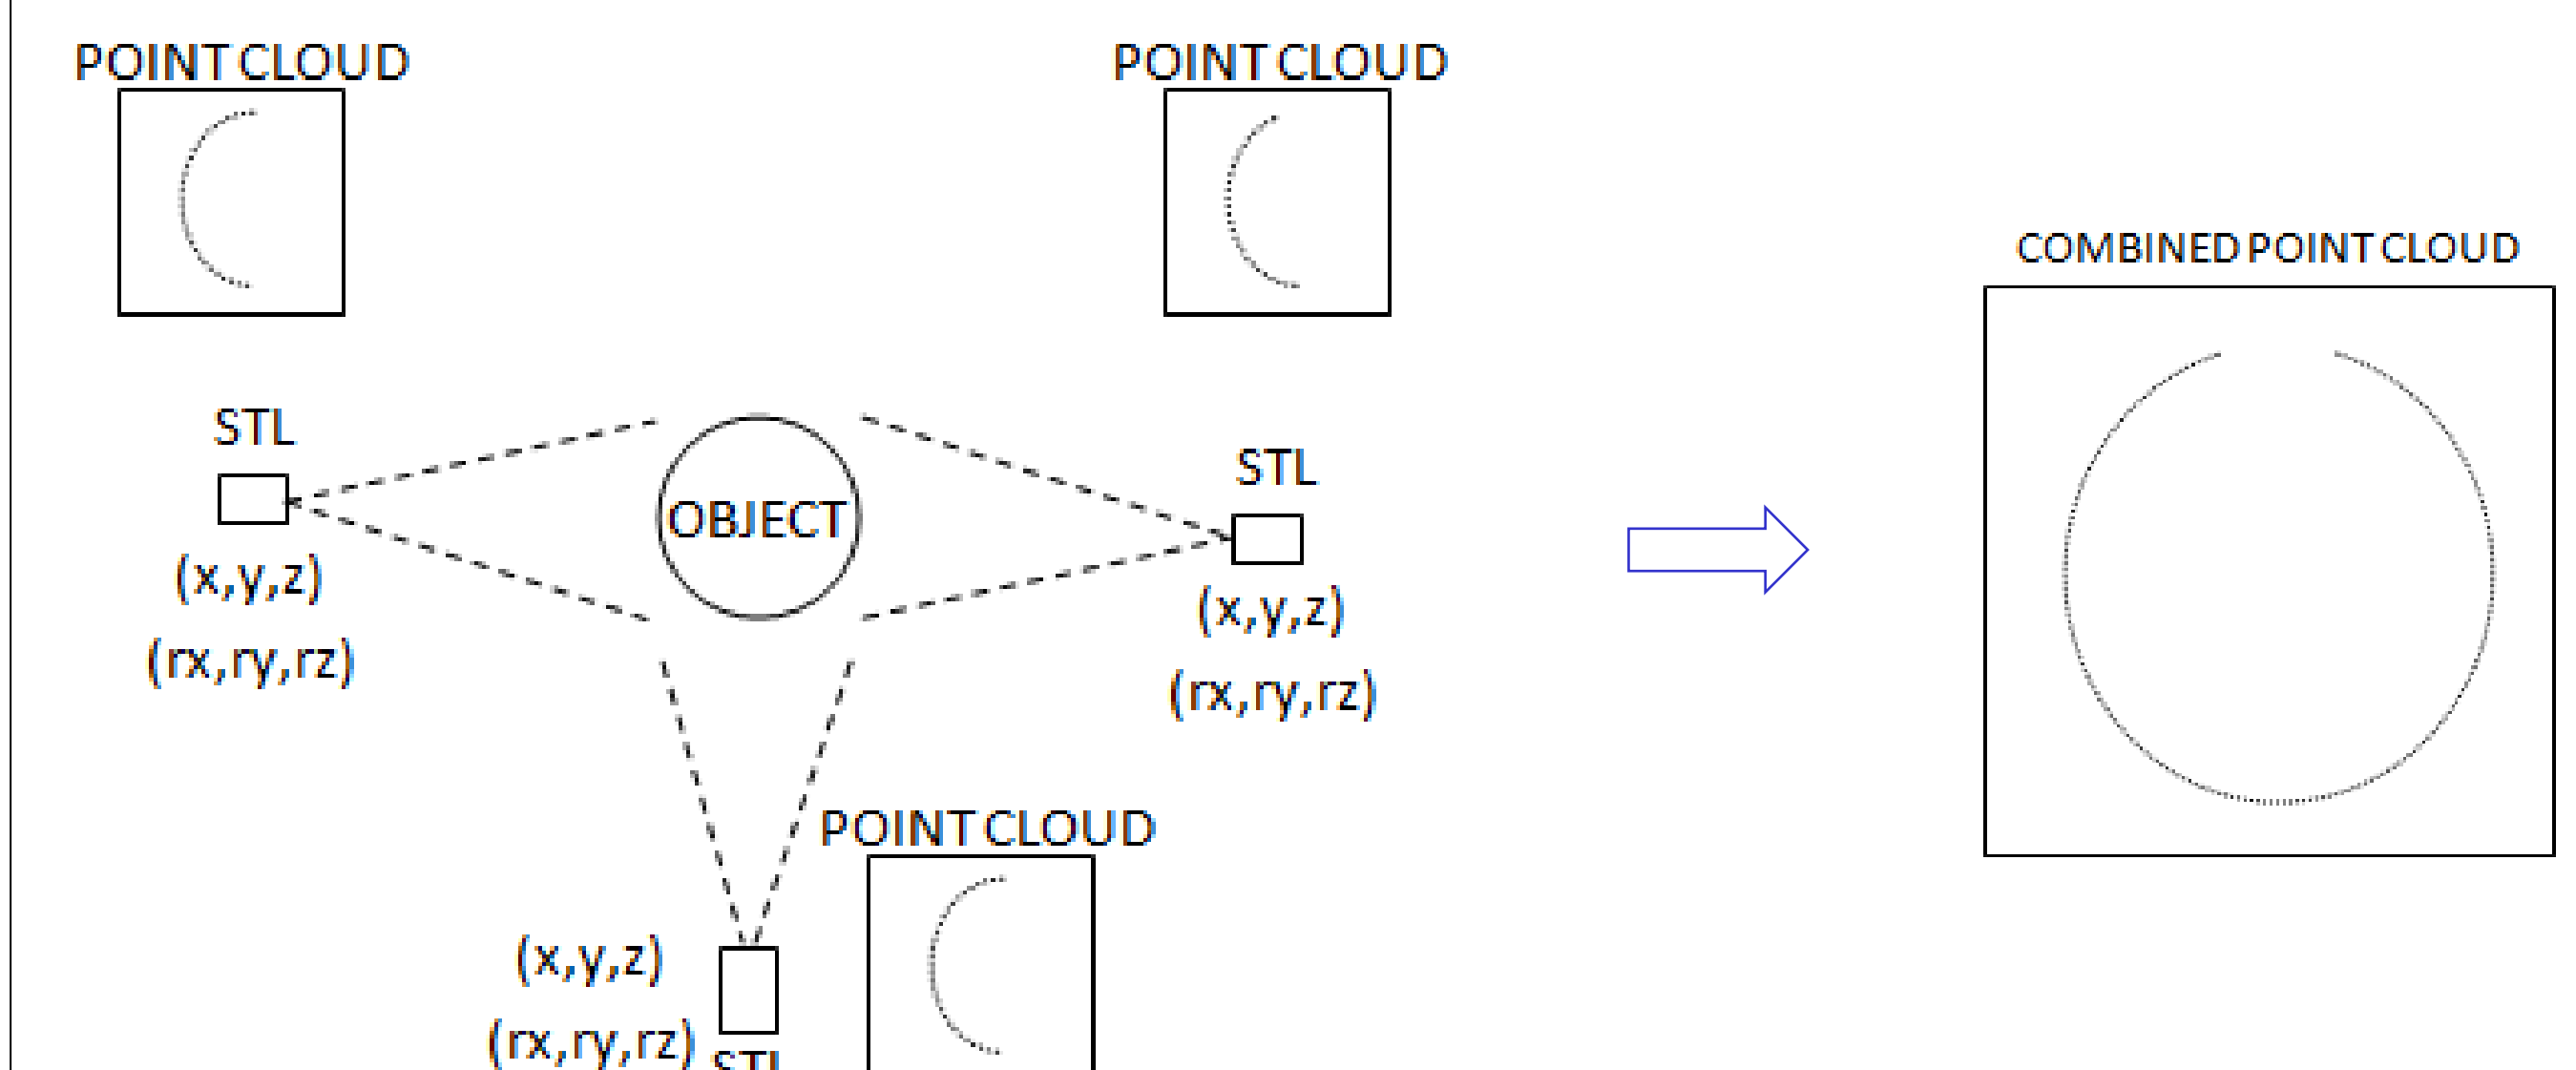


↑ Capturing datasets and generating point clouds from multiple angles. Recording all the positions and rotations of the scanner.

Rotating, moving and ↑ combining point clouds.

IMM INDUSTRIAL ROBOT

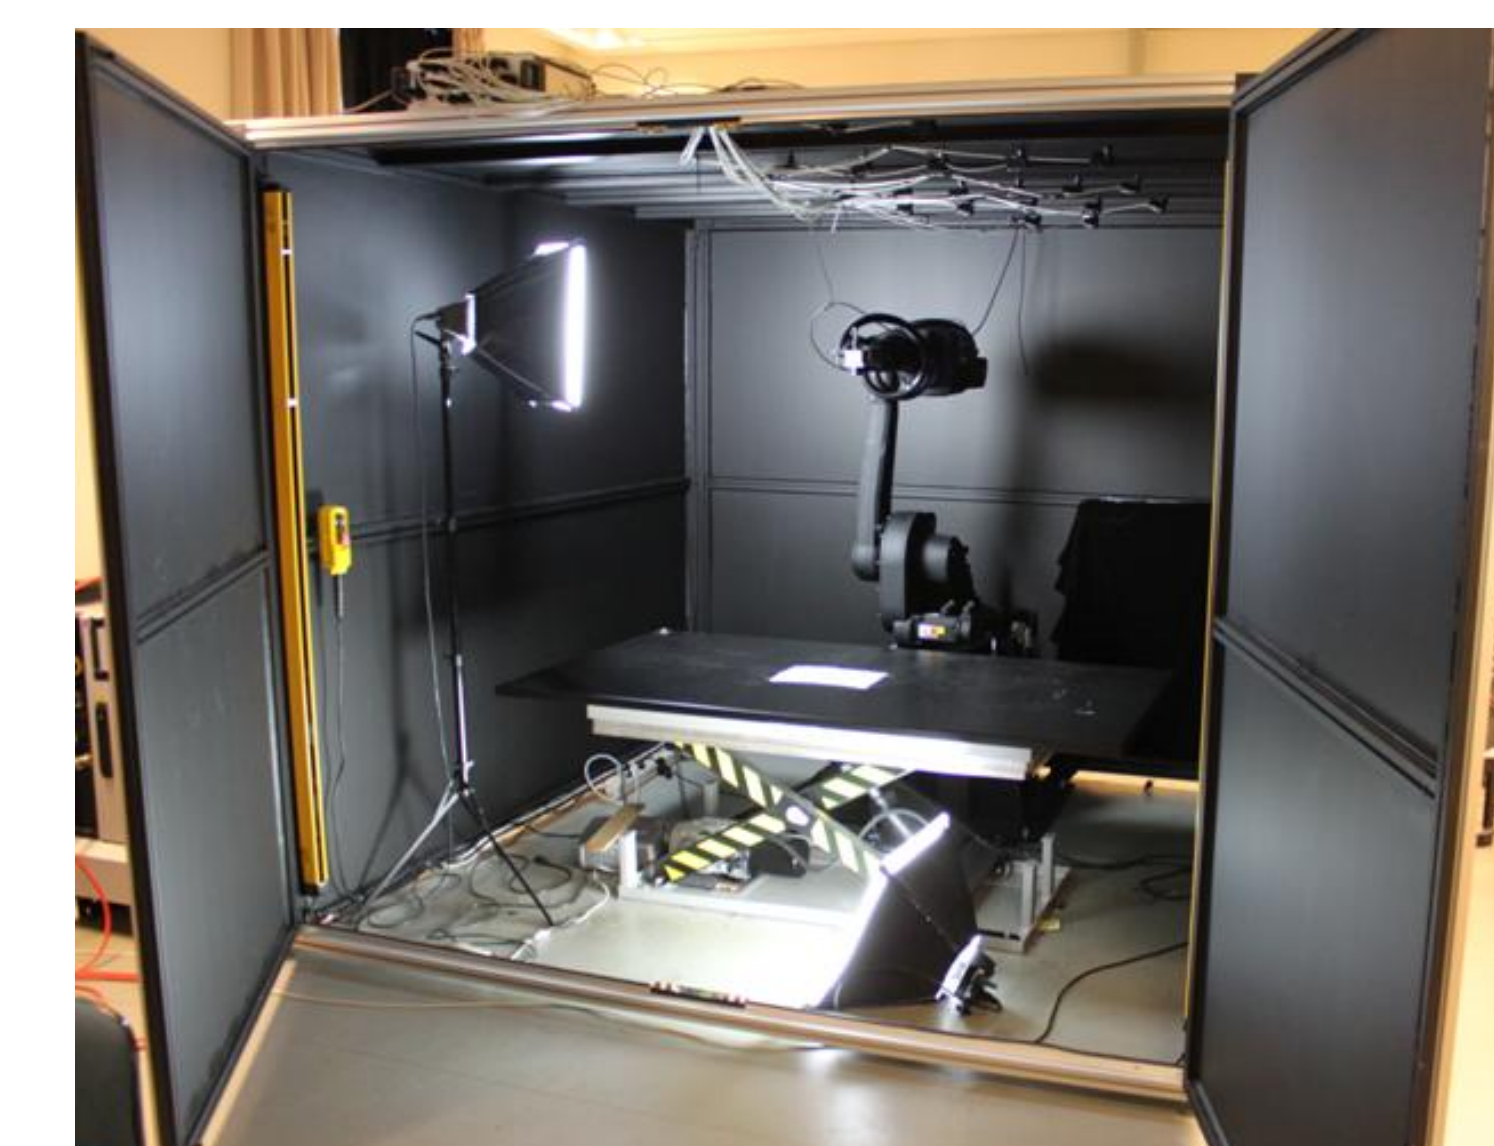

ROBOT COMPUTER

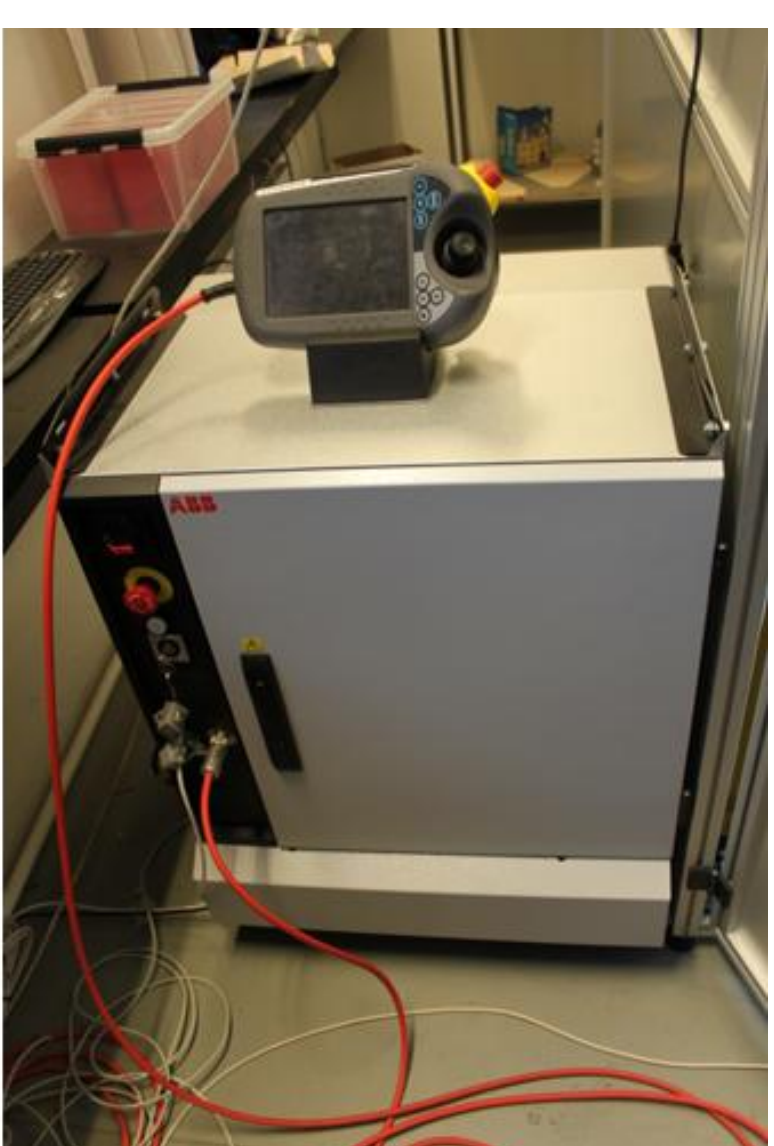

3

